



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q	A2	(11) International Publication Number: WO 97/16034 (43) International Publication Date: 1 May 1997 (01.05.97)
(21) International Application Number: PCT/SE96/01262 (22) International Filing Date: 4 October 1996 (04.10.96) (30) Priority Data: 08/547,543 24 October 1995 (24.10.95) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventor: SAWYER, François; 1895 Mégantic, St Hubert, Québec J3Y 7H7 (CA). (74) Agents: BOHLIN, Björn et al.; Telefonaktiebolaget LM Ericsson, Patent and Trademark Dept., S-126 25 Stockholm (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>
(54) Title: COMMUNICATIONS SERVICE BILLING BASED ON BANDWIDTH USE		
(57) Abstract <p>In a bandwidth-on-demand type communications system, like that provided with a code division multiple access (CDMA) cellular communications system, charging subscribers for calls based on communications length provides an inaccurate measure of communication cost, and further serves to discourage use of the system for data transmission applications. To provide a more accurate cost determination, the amount of bandwidth used by each communication is metered and multiplied by a charging rate. In particular, measurements (104) of the maximum amount of bandwidth (106, 108) used during predetermined time intervals (110) are made during the course of each communication, with the maximum bandwidth measurements being summed (112) to determine an estimate of the total amount of bandwidth used during the communication. The charge for the communication is then determined by multiplying (116) the estimated total bandwidth measurement by a charging rate multiplier.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

**COMMUNICATIONS SERVICE BILLING
BASED ON BANDWIDTH USE**

BACKGROUND OF THE INVENTION

5 Technical Field of the Invention

The present invention relates to bandwidth-on-demand type communications systems and, in particular, to a bandwidth-on-demand type cellular telephone system wherein subscribers are charged for use of the system based in part on the total amount of bandwidth used to carry the subscriber communication.

10 Description of Related Art

Conventional wire-line telephone service providers price telephone calls by taking into account a number of pricing structure parameters including call duration, call distance, time of day and day of the week. The generally fixed nature of the physical plant used to provide wire-line telephone service, coupled with the fact that calls are made from one known fixed geographic location to another, allows for the charges associated with providing the telephone service to be easily calculated and published.

The nature of the cellular telephone system, however, wherein system users have little or no geographical restrictions on the locations from which they may place or receive calls, makes the calculation of call charges more difficult. Rates vary based not only on some or all of the wire-line parameters mentioned above, but also on factors such as: which of several available cellular service providers carry the call; and whether the subscriber is roaming outside its own service area. The

-2-

main variable in the charging formula in the conventional cellular system remains, however, the duration of the call.

5 In conventional analog and digital cellular telephone systems (like those provided with the Advanced Mobile Phone Service (AMPS or D-AMPS) or the Global System for Mobile (GSM) communications), a physical channel (or succession of channels in cases of hand-off) on the air interface are reserved to carry the call. The same amount
10 of bandwidth is used on both the uplink and the downlink portions of the air interface connection throughout the duration of the call, even if the parties to the call are silent and no information is being carried. Duration based charging is therefore an appropriate measure of call
15 cost because once the channel is reserved and the connection is made, all of the available bandwidth on the reserved channel is then in use and is accordingly unavailable for use by others who desire cellular communications.

20 With the advent of the new bandwidth-on-demand type cellular telephone systems (like that provided in a code division multiple access (CDMA) or the like spread spectrum, bandwidth-on-demand type communications system), the communications are spread in a pseudo-random fashion
25 throughout the radio frequency spectrum. A reservation of a physical channel is made throughout the duration of the call, but the amount of bandwidth used varies during the course of the call, with the amount of bandwidth utilized being related in part to the amount of data sent
30 and received. In fact, the uplink and the downlink bandwidth needed for the call often times differ from each

-3-

other. Duration based charging is therefore an inappropriate measure of the cost of the call because relatively little bandwidth is needed to maintain the connection during times of silence, with the unused
5 bandwidth being immediately available for use by others who desire cellular communications.

There is accordingly a need for a more accurate charging measure to be applied to bandwidth-on-demand type communications systems. In this regard, the amount of
10 bandwidth used, rather than or in addition to the duration of the communication itself, should be a key factor in the charging determination.

SUMMARY OF THE INVENTION

15 The amount of bandwidth used during the course of communications carried by a bandwidth-on-demand type communications system is metered and multiplied by a charging rate to determine the charges incurred for the communication. In particular, periodic instantaneous
20 bandwidth use measurements are made during the course of each communication. The periodically made bandwidth use measurements are summed to determine an estimate of the total amount of bandwidth used to carry the communication. A charging rate multiplier is then applied to the
25 determined total bandwidth to obtain the charge incurred for the communication.

The present invention is applicable to any bandwidth-on-demand type communications system, including spread spectrum communications systems of the code division
30 multiple access (CDMA) type, and is particularly useful in CDMA or the like cellular telephone systems.

-4-

Instantaneous measurements are made of the bandwidth used on a bandwidth-on-demand communications link or air interface and summed to derive an estimate of the total amount of bandwidth used for the communication. The
5 charge incurred for that communication is then determined by multiplying the total amount of bandwidth used by a charging rate multiplier.

BRIEF DESCRIPTION OF THE DRAWINGS

10 A more complete understanding of the method and apparatus of the present invention may be obtained by reference to the following Detailed Description when taken in conjunction with the accompanying Drawings wherein:

FIGURE 1 is a block diagram of a bandwidth-on-demand
15 type communications system;

FIGURE 2 is a block diagram of a bandwidth-on-demand type cellular telephone system;

FIGURE 3A is a graph illustrating the bandwidth used in a forward or uplink direction for a portion of a
20 typical communication on the systems of FIGURES 1 and 2;

FIGURE 3B is a graph illustrating the bandwidth used in a reverse or downlink direction for a portion of a typical communication on the systems of FIGURES 1 and 2;
and

25 FIGURE 4 is a flow diagram illustrating the operation of the present invention.

DETAILED DESCRIPTION OF THE DRAWINGS

Reference is now made to FIGURE 1 wherein there is
30 shown a block diagram of a bandwidth-on-demand type communications system 10 including at least a first node

-5-

12 and a second node 14. Connected to each of the nodes 12 and 14 are a plurality of communications devices 16. The first and second nodes 12 and 14 are interconnected by a communications link 18 facilitating simultaneous plural communications between any of the communications devices 16 via the nodes and over the communications link.

Reference is now made to FIGURE 2 wherein there is shown a block diagram of a bandwidth-on-demand type cellular telephone system 20 including a single cell site 22. It will, of course, be understood that such a system 20 would typically include a plurality of cell sites 22, and that the depiction of a single cell site is to be taken as an illustration of, rather than a limitation on, the operation of the present invention. Each cell site 22 includes a base station (BS) 24 for effectuating bidirectional radio frequency communications over a radio frequency air interface 26 with mobile stations 28 operating within the system 20. It will further be understood that cellular telephone systems like the system 20 typically include far more than one mobile station 28 operating within the system 20, or any one cell site 22 therein, at any one time. The depiction of only one mobile station 28 then is to be taken as an illustration of, rather than a limitation on, the operation of the present invention. Each base station 24 is connected to a mobile switching center (MSC) 30 that is connected to the public switched telephone network (PSTN) 32 or other telephone network (not shown). The mobile switching center 30 operates to control base station 24 operation, maintain a record of mobile station location within the system 20 and switch, with the public switched telephone

-6-

network 32, those cellular telephone calls originated by or terminated at the mobile stations 28.

The communications link 18 and air interface 26 have a "connection-less" communications orientation. By
5 "connection-less" it is meant that the communications link 18 and air interface 26 offer bandwidth-on-demand for simultaneous communications. In the context of the communications link 18, packets of information originated at one of the communications devices 16 are transmitted
10 between the first and second nodes 12 and 14, respectively, without using a fixed amount of communications resource. Similarly, in the context of the air interface 26, packets of information are transmitted between the mobile stations 28 and the base station 24
15 without using a fixed amount of the communications resource. The communications link 18 or air interface 26 may accordingly comprise a spread spectrum communications link of the type provided through the use of a code division multiple access (CDMA) communications protocol.

20 Referring now also to FIGURES 3A and 3B, there are shown graphs illustrating the on-demand use of available bandwidth on either the communications link 18 or the air interface 26 during a portion of a single bi-directional communication or cellular telephone call. For each of the
25 graphs, the bandwidth used 34 on the communications link 18 or air interface 26 is plotted against the y-axis 36, while time over the displayed portion of the duration of the communication or call is plotted against the x-axis 38. In FIGURE 3A, the bandwidth used 34u is presented
30 with respect to the reverse or uplink portion of the communication or call over the communications link 18

-7-

(from the first node 12 to the second node 14) or the air interface 26 (from the mobile station 28 to the base station 24). FIGURE 3B, on the other hand, presents the bandwidth used 34d with respect to the forward or downlink portion of the communication or call over the communications link 18 (from the second node 14 to the first node 12) or the air interface 26 (from the base station 24 to the mobile station 28).

It will be noticed from a review of FIGURES 3A and 3B that the bandwidth used 34u and 34d varies considerably over the course of the communication or call. The momentary increases in bandwidth used 34u and 34d identify instances wherein packet transmissions 36 are made over the communications link 18 or the air interface 26. In this connection, it should be noted that the packet transmissions may comprise either voice or data communications. The minimum bandwidth level (Min) identifies the minimum amount of bandwidth needed (i.e., that must be used) in order to maintain the connectionless communication over the bandwidth-on-demand communications link 18 or air interface 26 in between instances of successive packet transmissions 36. That minimum amount of bandwidth is used for the transmission of command messages, such as power control orders and messages supporting mobile assisted hand-off.

Charging users for access to and the use of the communications link 18 of the communications system of FIGURE 1 or the air interface 26 of the cellular telephone system of FIGURE 2 is an important concern for the communications services provider. This charging aspect is the primary means by which revenue is generated for the

-8-

service provider. The conventional method of using the duration of the communication or call as the primary factor in determining the charge to be billed is not a particularly accurate method for use in bandwidth-on-demand type communications systems. The reason for this is that no fixed amount of communications resource is used to the exclusion of use of that resource by others. Rather, as indicated in FIGURES 3A and 3B, available bandwidth is used by the communication or call to a significant degree only when packet transmissions 36 are sent over the communications link 18 or the air interface 26. At all other times with respect to the illustrated communication, a small amount of bandwidth (identified by the minimum bandwidth level (Min)) is used to maintain the connection in place, thus limiting to some degree others from simultaneously accessing the system and using an available part of the bandwidth due to a reduction in communications capacity. Duration based charging further acts as a disincentive to use of the systems 10 and 20 for data applications because the connections are typically long term, expensive connections with periodic, brief data transmissions.

One solution to this charging concern is to charge the user based on the amount of packets of information in all of the packet transmissions 36 transmitted over the course of the communication. The use of packet amounts as the primary factor in determining the charge to be billed is also not particularly accurate in bandwidth-on-demand type communications systems because a user would be charged the same amount for a ten kilobyte packet transmission regardless of the length of the

-9-

communication. This charging scheme accordingly does not take into account the minimum level (Min) of bandwidth used in maintaining the communication over the communications link 18 or the air interface 26 in between instances of successive packet transmissions 36. Even though minimal in nature, use of that minimum amount of bandwidth affects the capability (i.e., capacity) of the system to simultaneously handle other communications and thus should be reflected in the charge billed to the user for making the communication or call.

Reference is now again made to FIGURE 1. The communications system 10 further includes a bandwidth use monitoring device (BUMD) 40 connected to either one or both of the nodes 12 and 14 and operable to make measurements for each communication carried over the communications link 18 of the instantaneous amount of bandwidth being used by the communication. The measurements may be made by the device 40 on either or both the reverse and/or the forward portions of the communications link 18. The results of these measurements are output to a processing device 42 associated with a billing center 44 for the system 10 that sums the bandwidth use measurements to derive an estimate of the total bandwidth usage amount for each communication. The bandwidth use monitoring device 40 and processing device 42 accordingly function as a bandwidth meter 46 measuring the total amount of bandwidth used for each communication. The processing device 42 then further functions to multiply the derived total bandwidth usage amounts by a charging rate to determine a charging amount to be billed for each communication, with the determined charging

-10-

amount reported to the billing center 44 for the addition of other charge items and the generation of a bill to the user.

5 The cellular telephone system 20 of FIGURE 2 includes a similar functionality for determining a charging amount to be billed for each cellular telephone call. The mobile switching center 30 includes or is connected to a bandwidth use monitoring device 40 operable to make measurements, for each call carried over the air interface 10 26, of the instantaneous amount of bandwidth being used for the call. These measurements may be made by the device 40 on either or both the uplink and/or the downlink portions of the air interface 26. The results of these periodically made, instantaneous measurements are output 15 to a processing device 42 associated with a billing center 44 for the cellular system 20 that sums the bandwidth use measurements to derive an estimate of the total bandwidth usage amount for each call. The bandwidth use monitoring device 40 and processing device 42 accordingly function 20 as a bandwidth meter 46 measuring the total amount of bandwidth used for each call. The processing device 42 then further functions to multiply the derived total bandwidth usage amounts by a charging rate to determine a charging amount to be billed for each communication, 25 with the determined charging amount reported to the billing center 44 for the addition of other charge items and the generation of a bill to the subscriber.

30 The operation of the bandwidth use monitoring device 40 and processing device 42 as a bandwidth meter 46 to determine the total amount of bandwidth being used for each communication or call carried over the communications

-11-

link 18 or air interface 26, respectively, may be better understood by referring again to FIGURE 3A. The bandwidth use monitoring device 40 operates to make instantaneous bandwidth use measurements, with the measurements reported to the processing device 42. The processing device 42 is programmed with a predetermined time interval Δt , and operates to determine (from the reported instantaneous measurements) the maximum amount 48 of bandwidth used during each time interval by each communication or call carried over the communications link 18 or air interface 26, respectively. The size of the predetermined time interval Δt determines the number of device 40 made instantaneous bandwidth use measurements considered in making the determination of the maximum amount 48 of bandwidth used during the time interval. The measured maximum amounts 48 of bandwidth are then summed by the processing device 42 over the course of the communication or call to derive an estimate of the total bandwidth usage amount. Multiplication of this total amount of bandwidth usage by a charging rate gives the charging amount to be billed by the billing center 44 to the user for its use of the communication link 18 or air interface 26.

The processing device 42 determined charging amount may not necessarily comprise the total charging amount billed to the user for the communication or call. For example, in the communications system 10 of FIGURE 1, the user may further be charged either a flat fee or a time based fee for usage of one of the communications devices 16 during the course of the communication. Such a charge might arise in situations where the communications device 16 used comprises a data service node (like a database),

-12-

and the user is charged not only for the connection made over the communications link 18 to the device, but also for use of the device itself. Similarly, in the cellular telephone system 20 of FIGURE 2, the user may further be charged a premium for being a roamer, and may also be charged a time based fee for usage of the public switched telephone network 32 (for example, if a long distance call was involved). The additional charges are added to the determined charging amount by the billing center 44 to provide a total charge for the communication or call.

Reference is now made to FIGURE 4 wherein there is shown a flow diagram illustrating one method of operating the bandwidth use monitoring device 40 and the processing device 42 as a bandwidth meter 46 to determine a charging amount to be billed for a single communication or call in the systems 10 and 20 of FIGURES 1 and 2. In step 100, the total bandwidth usage amount (T) is set equal to zero at the beginning of the communication or call. In steps 102-110, the communications link 18 or air interface 26 is monitored by the bandwidth use monitoring device 40 and processing device 42 to measure instantaneous bandwidth usage and determine the maximum interval bandwidth used by the communication or call during each of the predetermined time intervals Δt . In particular, in step 102 the maximum interval bandwidth (Tmax) is set equal to zero. An instantaneous measurement of the amount of bandwidth (Tm) being used for the communication or call is then made in step 104. A determination is then made in step 106 as to whether measured instantaneous bandwidth (Tm) is greater than the current maximum interval bandwidth (Tmax) value. If yes, the current maximum

-13-

bandwidth (T_{max}) value is set equal to the measured instantaneous bandwidth (T_m) in step 108. If no, step 108 is skipped. A determination is then made in step 110 as to whether the predetermined time interval Δt has expired.

5 If not, the process returns to step 104 to make another instantaneous measurement of the amount of bandwidth (T_m) being used for the communication or call, and then perhaps update the determination of the maximum interval bandwidth used (T_{max}). The length of the time interval Δt

10 determines the number of instantaneous measurements considered in determining the maximum interval bandwidth used in each time interval.

Once the predetermined time interval Δt expires and the maximum interval bandwidth used (T_{max}) by the

15 communication or call is determined in the manner described above for steps 102-110, the total bandwidth (T) used for the communication or call is updated in step 112 and set equal to the previous total (T) up to the last time interval plus the maximum interval bandwidth (T_{max})

20 used during the current time interval. A determination is then made in step 114 as to whether the communication or call being monitored has terminated. If no, the process returns to steps 102-110 to monitor the communications link 18 or air interface 26, to measure

25 instantaneous bandwidth usage, and to determine the maximum interval bandwidth used by the communication or call during a next one of the predetermined time intervals Δt for addition (in step 112) to the previously calculated summed total bandwidth (T). If yes, a calculation of the

30 charge (Ch) for the communication or call is then made in step 116 by multiplying the total bandwidth (T) determined

-14-

in step 112 by a charging rate (CR). In step 118, any additional charges for the communication or call are added to the charge (Ch) to give a total charge for the communication or call.

5 It should be noted that the method illustrated in FIGURE 4 could be simplified if the chosen value for Δt were small enough (i.e., having a frequency of more than twice the maximum rate of change of the bandwidth used), then steps 102, 106, 108 and 110 would not be needed. The
10 preferred embodiment of the invention includes these steps, however, to reduce the load on the processor 42 and its associated data storage elements (not shown).

 Although a preferred embodiment of the method and apparatus of the present invention has been illustrated
15 in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiment disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the
20 invention as set forth and defined by the following claims.

-15-

WHAT IS CLAIMED IS:

1. In a communications system having a bandwidth-on-demand type communications link, a method for determining a charge incurred for use of the communications link to carry a user communication, comprising the steps of:

estimating a total amount of communications link bandwidth used over the course of the user communication; and

10 multiplying the estimated total amount of bandwidth used by a charging rate to identify the charge incurred for the user communication.

2. The method as in claim 1 wherein the step of estimating the total amount of bandwidth used comprises the steps of:

measuring a maximum amount of bandwidth used on the communications link for the user communication during each of a plurality of time intervals measured over the course of the user communication; and

20 summing the measured maximum amounts of bandwidth to determine the estimated total amount of bandwidth used by the user communication.

3. The method as in claim 2 wherein the step of measuring comprises the steps of:

making instantaneous measurements of the bandwidth used during each time interval; and

selecting a largest one of the measurements as the maximum amount of bandwidth used during the time interval.

30

-16-

4. The method as in claim 1 wherein the bandwidth-on-demand type communications link operates in accordance with a code division multiple access (CDMA) communications interface.

5

5. The method as in claim 1 wherein the step of estimating comprises the step of metering the use of communications link bandwidth by the user communication.

10

6. In a cellular telephone system having a bandwidth-on-demand type air interface, a method for determining a charge incurred for use of the air interface to carry a subscriber communication, comprising the steps of:

15

estimating a total amount of air interface bandwidth used over the course of the subscriber communication; and multiplying the estimated total amount of bandwidth used by a charging rate to identify the charge incurred for the subscriber communication.

20

7. The method as in claim 6 wherein the step of measuring the total amount of bandwidth used comprises the steps of:

25

measuring a maximum amount of bandwidth used on the air interface for the subscriber communication during each of a plurality of time intervals measured over the course of the subscriber communication; and

30

summing the measured maximum amounts of bandwidth to determine the estimated total amount of bandwidth used by the subscriber communication.

-17-

8. The method as in claim 7 wherein the step of measuring comprises the steps of:

making instantaneous measurements of the bandwidth used during each time interval; and

5 selecting a largest one of the measurements as the maximum amount of bandwidth used during the time interval.

9. The method as in claim 6 wherein the bandwidth-on-demand type air interface operates in accordance with
10 a code division multiple access (CDMA) communications air interface.

10. The method as in claim 6 wherein the step of estimating comprises the step of metering the use of air
15 interface bandwidth by the subscriber communication.

11. A communications system, comprising:

a first communications node;

a second communications node;

20 a bandwidth-on-demand communications link interconnecting the first and second communications nodes to simultaneously carry a plurality of user communications between the first and second communications nodes; and

means for determining a charge incurred for use of
25 the communications link by each of the user communications, the charge incurred being calculated based on a measurement of a total amount of bandwidth used by each user communication.

30 12. The system of claim 11 wherein the means for determining comprises:

-18-

means for making instantaneous measurements of bandwidth used over the course of each user communication;

means for summing the bandwidth measurements to determine an estimate of the total amount of bandwidth used for each user communication; and

means for multiplying each of the determined total amounts of bandwidth used by a charging rate to determine the charges incurred for use of the communications link by each user communication.

13. The system of claim 11 wherein the bandwidth-on-demand communications link operates in accordance with a code division multiple access (CDMA) communications interface.

14. The system of claim 11 wherein the means for determining comprises:

a bandwidth use meter for measuring the total amount of bandwidth used for each user communication; and

means for multiplying the metered total amount of bandwidth for each user communication by a charging rate.

15. A cellular telephone system, comprising:

a base station;

a plurality of subscriber mobile stations;

a bandwidth-on-demand air interface interconnecting the plurality of subscriber mobile stations with the base station to simultaneously carry a plurality of subscriber communications between the mobile stations and the base station; and

means for determining a charge incurred for use of the air interface by each of the subscriber

-19-

communications, the charge incurred being calculated based on an estimation of a total amount of bandwidth used by each subscriber communication.

5 16. The system of claim 15 wherein the means for determining comprises:

 means for making instantaneous measurements of bandwidth used over the course of each subscriber communication;

10 means for summing the periodic bandwidth measurements to determine an estimate of the total amount of bandwidth used for each subscriber communication; and

 means for multiplying each of the determined total amounts of bandwidth used by a charging rate to determine
15 the charges incurred for use of the communications link by each subscriber communication.

 17. The system of claim 15 wherein the bandwidth-on-demand air interface operates in accordance with a code
20 division multiple access (CDMA) communications air interface.

 18. The system of claim 15 wherein the means for determining comprises:

25 a bandwidth meter for measuring the total amount of bandwidth used for each subscriber communication; and

 means for multiplying the metered amount of bandwidth for each subscriber communication by a charging rate.

30

1 / 2

FIG. 1

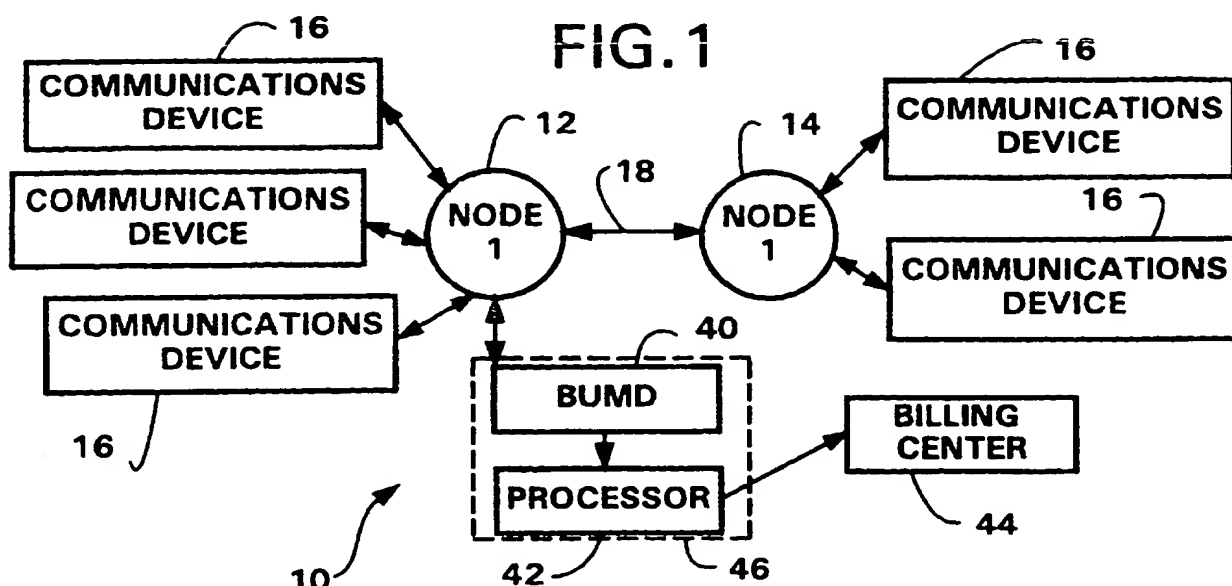


FIG. 2




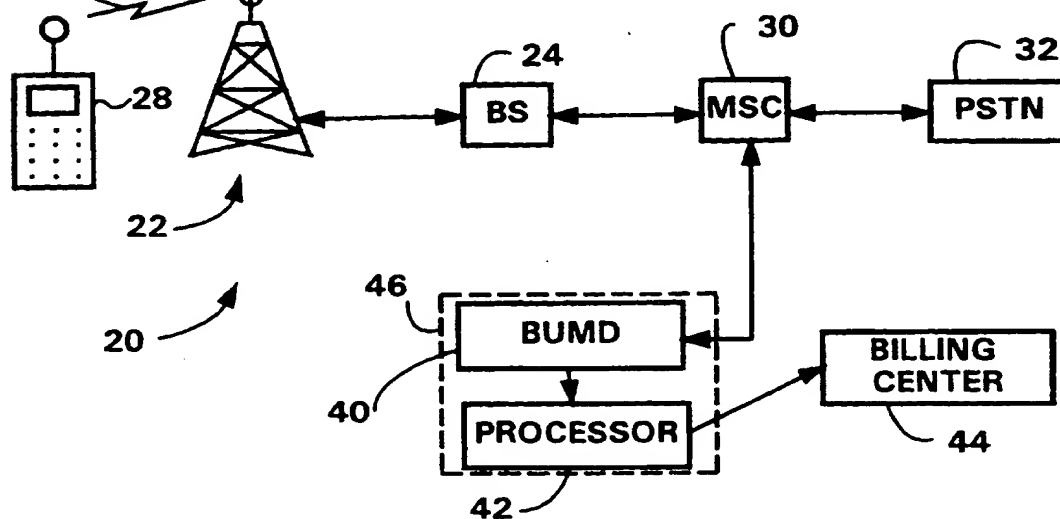


FIG. 3A

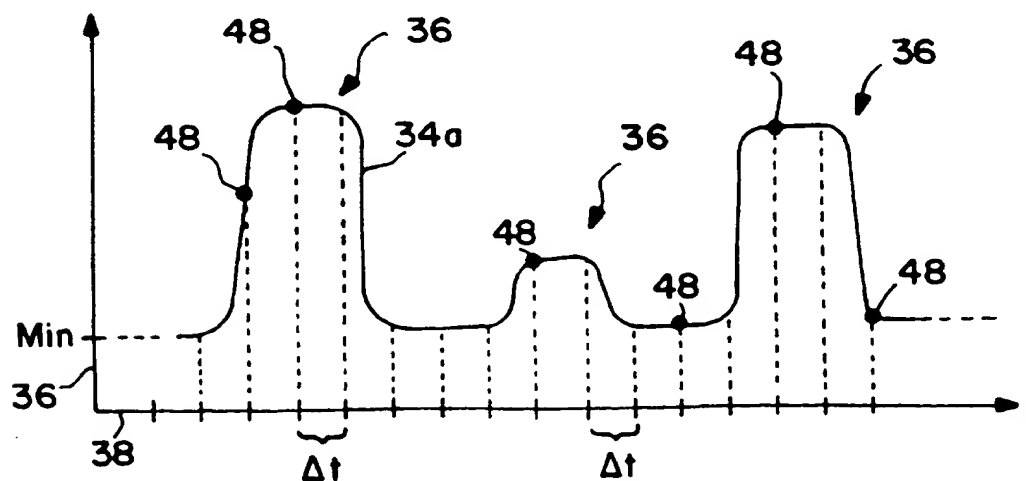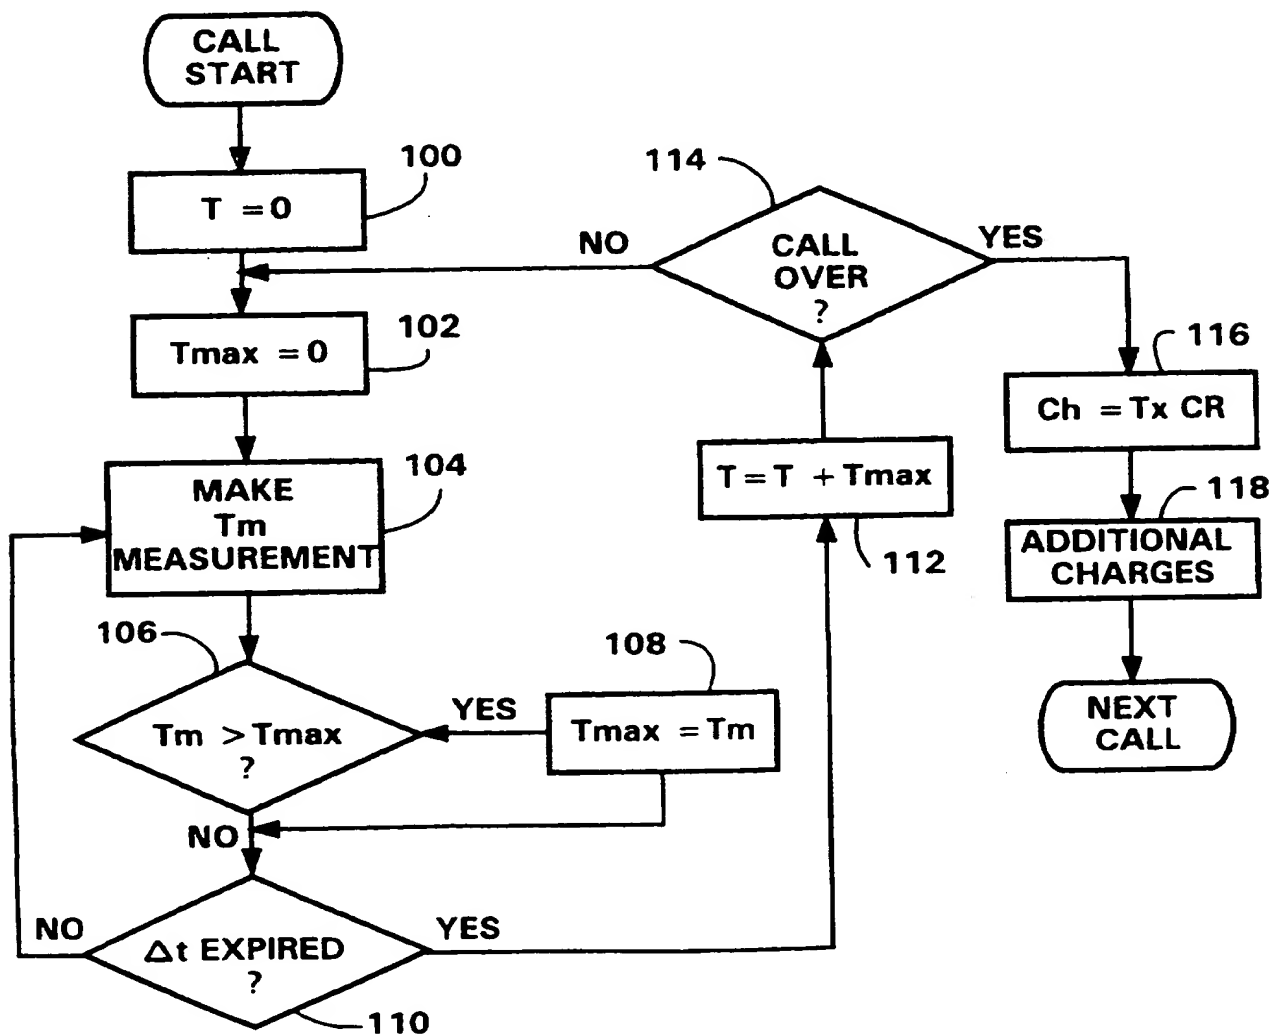

2 / 2

FIG. 3B

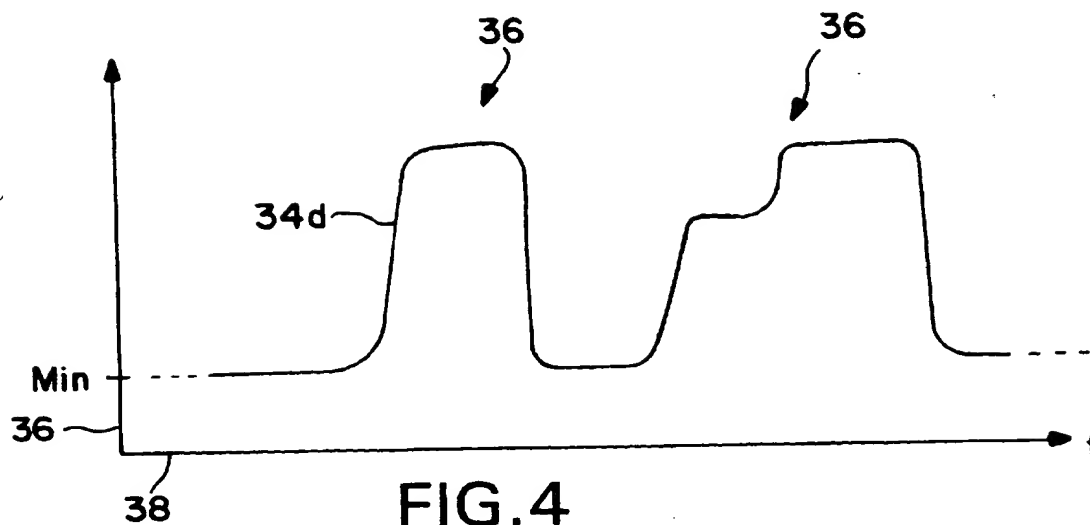

THIS PAGE BLANK (USPTO)

<p>(51) International Patent Classification ⁶ : H04L 12/14, H04M 15/00, 15/12</p>	<p>A3</p>	<p>(11) International Publication Number: WO 97/16034</p> <p>(43) International Publication Date: 1 May 1997 (01.05.97)</p>
<p>(21) International Application Number: PCT/SE96/01262</p> <p>(22) International Filing Date: 4 October 1996 (04.10.96)</p> <p>(30) Priority Data: 08/547,543 24 October 1995 (24.10.95) US</p> <p>(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) {SE/SE}; S-126 25 Stockholm (SE).</p> <p>(72) Inventor: SAWYER, François; 1895 Mégantic, St Hubert, Québec J3Y 7H7 (CA).</p> <p>(74) Agents: BOHLIN, Björn et al.; Telefonaktiebolaget LM Ericsson, Patent and Trademark Dept., S-126 25 Stockholm (SE).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> <p>(88) Date of publication of the international search report: 5 June 1997 (05.06.97)</p>
<p>(54) Title: COMMUNICATIONS SERVICE BILLING BASED ON BANDWIDTH USE</p>		
<p>(57) Abstract</p> <p>In a bandwidth-on-demand type communications system, like that provided with a code division multiple access (CDMA) cellular communications system, charging subscribers for calls based on communications length provides an inaccurate measure of communication cost, and further serves to discourage use of the system for data transmission applications. To provide a more accurate cost determination, the amount of bandwidth used by each communication is metered and multiplied by a charging rate. In particular, measurements (104) of the maximum amount of bandwidth (106, 108) used during predetermined time intervals (110) are made during the course of each communication, with the maximum bandwidth measurements being summed (112) to determine an estimate of the total amount of bandwidth used during the communication. The charge for the communication is then determined by multiplying (116) the estimated total bandwidth measurement by a charging rate multiplier.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/SE 96/01262

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04L12/14 H04M15/00 H04M15/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04M H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 065 393 A (SIBBITT ET AL.) 12 November 1991 see column 2, line 47 - column 3, line 19 ---	1,11
X	WO 95 24812 A (OXFORD BROOKES UNIVERSITY) 14 September 1995 see page 1, line 21 - page 4, line 3 ---	1
X	WO 95 27385 A (TELCO SYSTEMS, INC.) 12 October 1995 see page 2, line 7 - line 10 see page 6, line 9 - line 14 ---	1
A	EP 0 506 255 A (SPACE SYSTEMS/LORAL INC.) 30 September 1992 see the whole document --- -/--	1-18



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- 'A' document defining the general state of the art which is not considered to be of particular relevance
- 'E' earlier document but published on or after the international filing date
- 'L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- 'O' document referring to an oral disclosure, use, exhibition or other means
- 'P' document published prior to the international filing date but later than the priority date claimed

- 'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- 'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- 'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- '&' document member of the same patent family

Date of the actual completion of the international search

3 March 1997

Date of mailing of the international search report

10.04.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Montalbano, F

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS, vol. 13, no. 7, September 1995, NEW YORK, NY, US, pages 1162-1175, XP000525655 R.J.EDELL ET AL.: "Billing Users and Pricing for TCP" see page 1162, column 2, line 36 - line 38 ---	
A	29TH IEEE VEHICULAR TECHNOLOGY CONFERENCE, 27 March 1979, ARLINGTON HEIGHTS, ILLINOIS, pages 245-252, XP002026817 M.H.CALLENDAR ET AL.: "Network Design for a Fully Automatic wide area radiotelephone service" see abstract -----	

INTERNATIONAL SEARCH REPORT

on patent family members

International Application No.

PCT/SE 96/01262

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5065393 A	12-11-91	NONE	
WO 9524812 A	14-09-95	AU 1855695 A	25-09-95
		CA 2184830 A	14-09-95
		EP 0749668 A	27-12-96
		NO 963695 A	11-11-96
		US 5504744 A	02-04-96
WO 9527385 A	12-10-95	US 5570345 A	29-10-96
		US 5526362 A	11-06-96
EP 506255 A	30-09-92	US 5303286 A	12-04-94
		CA 2063124 A	30-09-92
		DE 69215257 D	02-01-97
		JP 2558573 B	27-11-96
		JP 6181454 A	28-06-94

THIS PAGE BLANK (USPTO)